




# Membrane Technologies

## DMD Series Dryers

## ESM Series Dryers

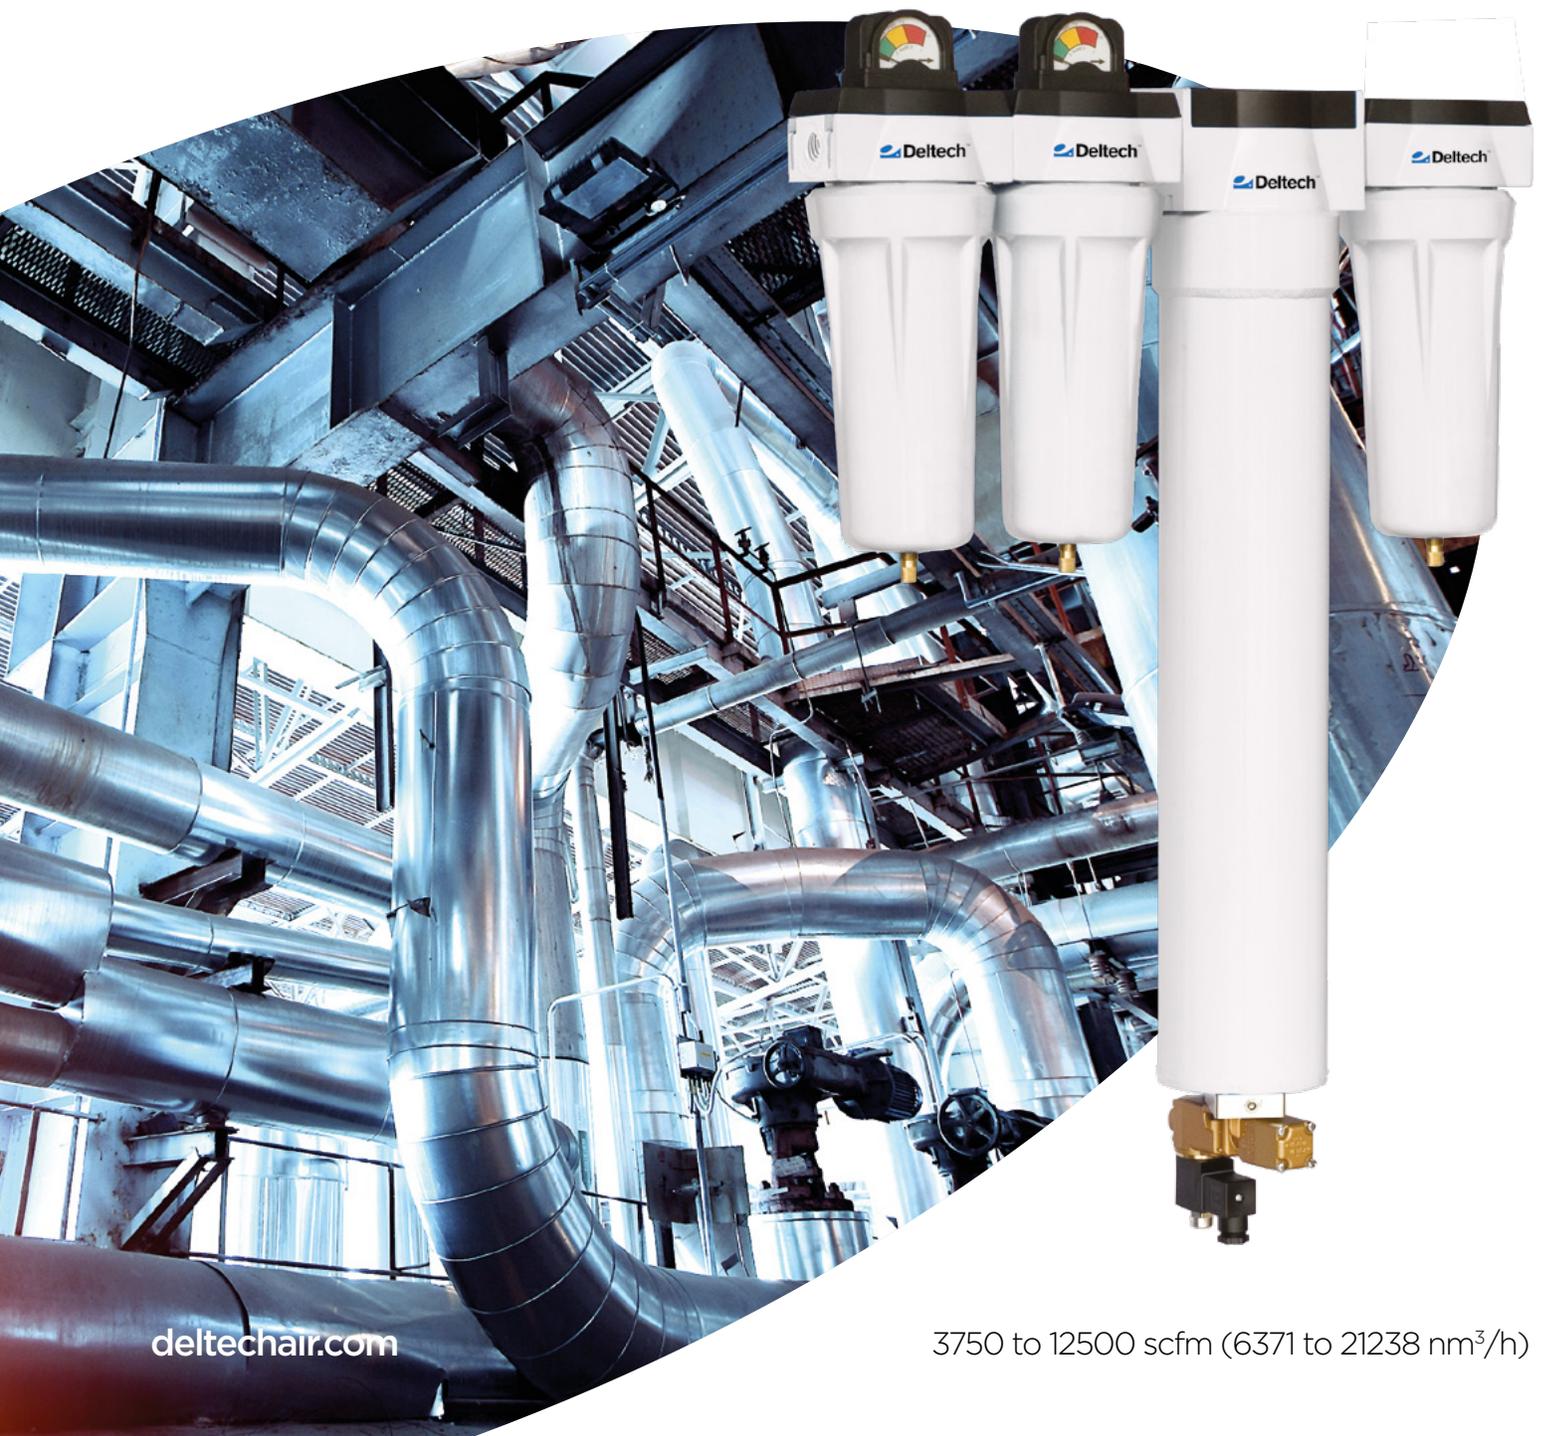

[deltechair.com](http://deltechair.com)


3750 to 12500 scfm (6371 to 21238 nm<sup>3</sup>/h)

## Energy Saving Compressed Air Dryers

People around the globe have relied on Deltech to deliver energy efficiency and value in meeting their compressed air treatment needs. ESM Series and DMD Series Modular Membrane Compressed Air Dryers offer you two revolutionary “point-of-use” alternatives for low dew point applications.

### Membrane Drying

Deltech modular membrane compressed air dryers were developed to complement our stable of industry leading refrigeration, adsorption and filtration technologies. Membrane dryers use a bundle of tiny tubular fibers that let fast gases like water vapor permeate through the tube wall to be swept away into the ambient. Our membrane fiber technology features multiple strands to form a continuous microscopic sieve that targets and removes “fast gases” like water molecules as a vapor.

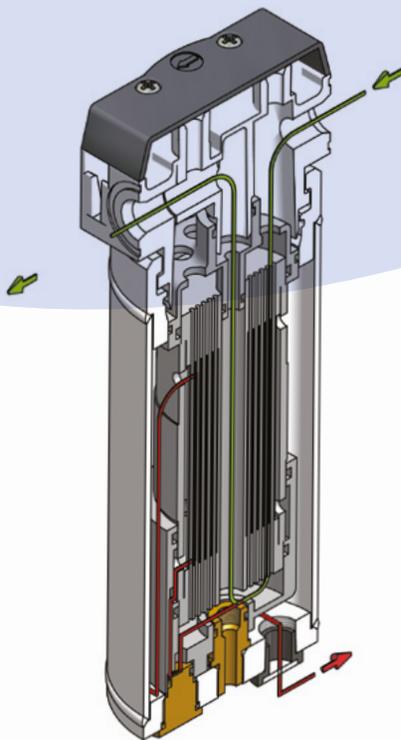


Pressure dew points from +50°F to -40°F are achieved by balancing the model size, air pressure and volume (scfm) requirements to the application.

### Selective Permeation

Through the process of selective permeation, water vapor is removed while leaving the gas composition intact. Each membrane bundle is comprised of multiple tubular membrane fibers, evenly spaced to provide maximum surface area in a compact design. Each helically wrapped layer alternates direction to ensure consistent cross-sectional density and large flow paths for the sweep air that carries the water vapor to atmosphere. No oxygen is lost, which makes these ideal for medical applications.

### Selective Permeation Process

- Compressed air enters the center of the membrane tubes
- Water (H<sub>2</sub>O) vapor diffuses through the membrane wall faster than the other gases
- A small portion of dry compressed air is swept back across the outside of the membrane walls to evacuate the H<sub>2</sub>O vapor to atmosphere
- Dry compressed air exits the unit ready for process applications

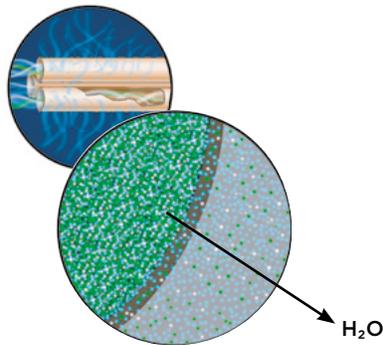

## The Deltech Commitment


Deltech sets the standard of excellence in technology for today's growing industries.

We build relationships by understanding the requirements of our customers. As a result, the compressed air solutions we develop enable end users of Deltech products to meet their objectives of improved productivity and optimized efficiency. We will continue to dedicate our research and development resources in providing new and innovative air treatment products, inspired by our valued customers.

# Modular Membrane Compressed Air Dryers

### Energy Efficient, Space Saving Designs

- Inside-to-outside permeation for greater efficiency
- Helically wound bundles for low pressure drop, high flow capacity
- Compact design offers a space-saving point-of-use solution
- Internal and external epoxy powder coat offers durable protection
- Modular connections reduce leak points and simplify installation
- Dewpoints to  $-40^{\circ}\text{F}$

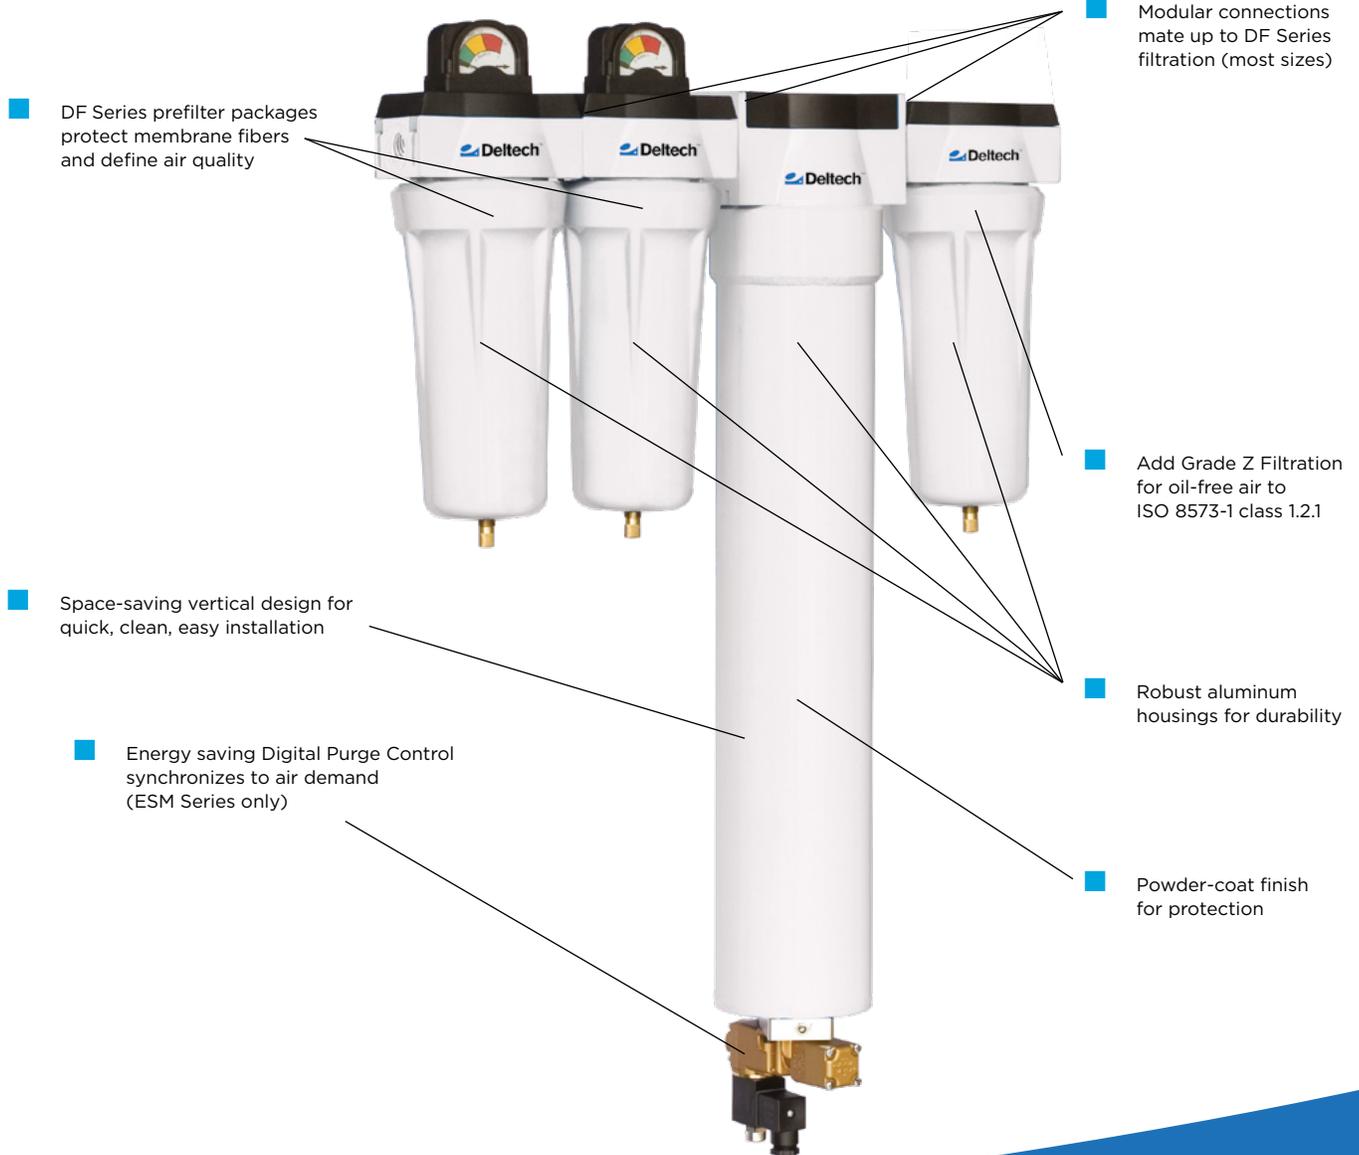

## DMD Series Continuous Flow Membrane Dryer

DMD Series modular membrane compressed air dryers provide clean, dry compressed air wherever you need it. Designed for continuous flow applications, DMD Series dryers pass a constant side-stream of dry sweep air to exhaust the extracted water vapor into the ambient surroundings.



### Modular DF Series Air Preparation

Operation requires the removal of contaminants like liquid water, compressor lubricant, dust, rust, and pipe scale before entering the dryer. Clean, filtered, compressed air will reward you with many years of satisfactory performance from your Modular Membrane dryer.

Simply select the series and model that meets your requirements, then, add the level of filtration you need.

### Filter Package Recommendations

| Application   | Max. Liquid Inlet Content to Filter | Recommended DF Series Filtration  |
|---|-------------------------------------|---|
| Space-sensitive OEM's & Pkgs.                                     | 1,000 ppm w/w                       | Prefilter: Grade B - 0.008 ppm (0,01 mg/m <sup>3</sup> ) oil removal  |
| General Industrial Point-of-use                                   | 2,000 ppm w/w                       | Prefilters: Grade C - 1 micron particulate<br>Grade A - 0.0008 ppm (0,001 mg/m <sup>3</sup> ) oil removal   |
| Food & Pharmaceuticals Direct & Indirect air contact with product | 2,000 ppm w/w                       | Prefilters: Grade C - 1 micron particulate<br>Grade A - 0.0008 ppm (0,001 mg/m <sup>3</sup> ) oil removal<br>Afterfilter: Grade Z- Oil vapor and 0.003 ppm (0,004 mg/m <sup>3</sup> ) oil removal |

### Typical Applications

- Original Equipment Manufacturers (O.E.M.)
- NEMA 7 Hazardous Environments (DMD Series only)
- Paint Spray Booths
- Dust Collectors
- Coordinate Measuring Machines
- Fluid Agitation
- Dental, Medical, Distilling, Photo Processing, Packaging, Graphic Arts, and Dry Cleaning Equipment
- Instrument Air
- Locomotive Air Brakes
- Oil & Gas Wells
- Ozone Generators
- Air Logic
- Rapid Transit Fare Collection Systems
- Air Blanketing
- Telephone Cable Pressurization
- Ship Supply Air
- Laboratory Instruments
- Control Panel Purge Air
- Optical Lens Cleaning
- Laser Optics
- Welding Equipment
- Chemical and Gas Analyzers
- Dimensioning and Positioning Machines
- Product Fluidization

# Deltech ESM Series Energy Saving Membrane Dryers

ESM Series energy saving membrane dryers are designed to help you gain control over wasted energy. Featuring digital purge control, it is perfect for helping you save energy in applications where process air demands start and stop. Traditional membrane dryers are designed for 24/7 operations in continuous flow applications. They pass a constant side-stream of dry process gas known as “sweep air” to exhaust extracted water vapor into the ambient surroundings. When applied to intermittent duty applications that valuable sweep air is wasted when there is no air demand. This costs you money and adds unnecessary wear and tear to your air compressor.



## Reduce Power Costs

ESM Series’ digital purge control (DPC) accepts your demand signal to open and close an integrated normally open, two-way valve to control the sweep air. A “zero demand” signal keeps the bore of the membrane fibers pressurized while DPC eliminates the waste of sweep air to save you energy. Initiate the process’ “air demand” signal to start the flow of sweep air. Cycle tested to over 1 million cycles.

## Save A Bundle

ESM Series guarantees constant pressure differential that prevents fiber flexing from pressure surges – the leading cause of membrane fiber failure. Energy saving operation and long bundle life requires constant pressure differential to protect the fibers from damaging shock waves. Controlling sweep air waste by applying a solenoid valve to a sweep air exhaust port, allows the pressures to equalize. Upon release, the shock from the rapidly expanding air causes fatigue of the tiny tubes, cracks develop, fibers break, pressure dew point deteriorates, and the bundle fails. ESM Series saves you a bundle.

## Sweepsaver™ Energy Savings

| Model   | Air Demand |       |         |         |         |
|---------|------------|-------|---------|---------|---------|
|         | 90%        | 75%   | 50%     | 25%     | 10%     |
| ESM1-3  | \$3        | \$8   | \$17    | \$25    | \$30    |
| ESM2-3  | \$11       | \$26  | \$53    | \$79    | \$95    |
| ESM3-4  | \$23       | \$58  | \$116   | \$174   | \$208   |
| ESM4-4  | \$31       | \$78  | \$156   | \$234   | \$281   |
| ESM5-6  | \$58       | \$145 | \$291   | \$436   | \$523   |
| ESM6-6  | \$90       | \$225 | \$449   | \$674   | \$809   |
| ESM7-8  | \$168      | \$420 | \$839   | \$1,259 | \$1,511 |
| ESM8-16 | \$259      | \$647 | \$1,295 | \$1,942 | \$2,330 |
| ESM9-16 | \$330      | \$825 | \$1,649 | \$2,474 | \$2,969 |

Assumes \$0.10 per kWh, 8,760 hours, 4 cfm/HP





# DMD and ESM Product Specifications

## Inlet and Outlet Flow Capacity at 100 psig

|      | -Inlet Temp (°F) | Flow scfm | Outlet Pressure Dew Point (°F) |       |       |      |       |      |      |
|------|------------------|-----------|--------------------------------|-------|-------|------|-------|------|------|
|      |                  |           | 50                             | 40    | 20    | 0    | -20   | -40  |      |
| ESM1 | 40               | Inlet     | -                              | -     | -     | 1.48 | 1.07  | 0.81 |      |
|      |                  | Outlet    | -                              | -     | -     | 1.29 | 0.88  | 0.62 |      |
|      | 60               | Inlet     | -                              | -     | 1.62  | 1.18 | 0.90  | 0.69 |      |
|      |                  | Outlet    | -                              | -     | 1.43  | 0.99 | 0.71  | 0.50 |      |
|      | 80               | Inlet     | -                              | 1.76  | 1.29  | 0.99 | 0.77  | 0.60 |      |
|      |                  | Outlet    | -                              | 1.57  | 1.10  | 0.80 | 0.58  | 0.41 |      |
|      | 100              | Inlet     | 1.59                           | 1.39  | 1.08  | 0.85 | 0.67  | 0.53 |      |
|      |                  | Outlet    | 1.40                           | 1.20  | 0.89  | 0.66 | 0.48  | 0.34 |      |
|      | 120              | Inlet     | 1.31                           | 1.17  | 0.94  | 0.75 | 0.60  | 0.48 |      |
|      |                  | Outlet    | 1.12                           | 0.98  | 0.75  | 0.56 | 0.41  | 0.29 |      |
|      | 150              | Inlet     | 1.06                           | 0.96  | 0.79  | 0.64 | 0.52  | -    |      |
|      |                  | Outlet    | 0.87                           | 0.77  | 0.60  | 0.45 | 0.33  | -    |      |
|      | ESM2             | 40        | Inlet                          | -     | -     | -    | 4.80  | 3.56 | 2.75 |
|      |                  |           | Outlet                         | -     | -     | -    | 4.20  | 2.96 | 2.15 |
| 60   |                  | Inlet     | -                              | -     | 5.24  | 3.88 | 3.02  | 2.38 |      |
|      |                  | Outlet    | -                              | -     | 4.64  | 3.28 | 2.42  | 1.78 |      |
| 80   |                  | Inlet     | -                              | 5.67  | 4.23  | 3.30 | 2.63  | 2.10 |      |
|      |                  | Outlet    | -                              | 5.07  | 3.63  | 2.70 | 2.03  | 1.50 |      |
| 100  |                  | Inlet     | 5.15                           | 4.55  | 3.60  | 2.89 | 2.34  | 1.88 |      |
|      |                  | Outlet    | 4.55                           | 3.95  | 3.00  | 2.29 | 1.74  | 1.28 |      |
| 120  |                  | Inlet     | 4.29                           | 3.88  | 3.16  | 2.58 | 2.10  | 1.70 |      |
|      |                  | Outlet    | 3.69                           | 3.28  | 2.56  | 1.98 | 1.50  | 1.10 |      |
| 150  |                  | Inlet     | 3.52                           | 3.23  | 2.69  | 2.22 | 1.83  | -    |      |
|      |                  | Outlet    | 2.92                           | 2.63  | 2.09  | 1.62 | 1.23  | -    |      |
| ESM3 |                  | 40        | Inlet                          | -     | -     | -    | 10.04 | 7.21 | 5.38 |
|      |                  |           | Outlet                         | -     | -     | -    | 8.72  | 5.89 | 4.06 |
|      | 60               | Inlet     | -                              | -     | 11.09 | 7.93 | 5.98  | 4.57 |      |
|      |                  | Outlet    | -                              | -     | 9.77  | 6.61 | 4.66  | 3.25 |      |
|      | 80               | Inlet     | -                              | 12.07 | 8.73  | 6.62 | 5.11  | 3.97 |      |
|      |                  | Outlet    | -                              | 10.75 | 7.41  | 5.30 | 3.79  | 2.65 |      |
|      | 100              | Inlet     | 10.87                          | 9.47  | 7.29  | 5.69 | 4.47  | 3.50 |      |
|      |                  | Outlet    | 9.55                           | 8.15  | 5.97  | 4.37 | 3.15  | 2.18 |      |
|      | 120              | Inlet     | 8.88                           | 7.92  | 6.29  | 4.99 | 3.96  | 3.13 |      |
|      |                  | Outlet    | 7.56                           | 6.60  | 4.97  | 3.67 | 2.64  | 1.81 |      |
|      | 150              | Inlet     | 7.09                           | 6.44  | 5.24  | 4.22 | 3.39  | -    |      |
|      |                  | Outlet    | 5.77                           | 5.12  | 3.92  | 2.90 | 2.07  | -    |      |

|      | -Inlet Temp (°F) | Flow scfm | Outlet Pressure Dew Point (°F) |       |       |       |       |      |      |
|------|------------------|-----------|--------------------------------|-------|-------|-------|-------|------|------|
|      |                  |           | 50                             | 40    | 20    | 0     | -20   | -40  |      |
| ESM4 | 40               | Inlet     | -                              | -     | -     | 14.41 | 10.83 | 8.46 |      |
|      |                  | Outlet    | -                              | -     | -     | 12.63 | 9.05  | 6.68 |      |
|      | 60               | Inlet     | -                              | -     | 15.72 | 11.75 | 9.24  | 7.36 |      |
|      |                  | Outlet    | -                              | -     | 13.94 | 9.97  | 7.46  | 5.58 |      |
|      | 80               | Inlet     | -                              | 16.96 | 12.76 | 10.07 | 8.10  | 6.53 |      |
|      |                  | Outlet    | -                              | 15.18 | 10.98 | 8.29  | 6.32  | 4.75 |      |
|      | 100              | Inlet     | 15.45                          | 13.69 | 10.94 | 8.86  | 7.22  | 5.87 |      |
|      |                  | Outlet    | 13.67                          | 11.91 | 9.16  | 7.08  | 5.44  | 4.09 |      |
|      | 120              | Inlet     | 12.95                          | 11.74 | 9.65  | 7.93  | 6.52  | 5.33 |      |
|      |                  | Outlet    | 11.17                          | 9.96  | 7.87  | 6.15  | 4.74  | 3.55 |      |
|      | 150              | Inlet     | 10.68                          | 9.84  | 8.26  | 6.88  | 5.71  | -    |      |
|      |                  | Outlet    | 8.90                           | 8.06  | 6.48  | 5.10  | 3.93  | -    |      |
|      | ESM5             | 40        | Inlet                          | -     | -     | -     | 25.7  | 18.4 | 13.3 |
|      |                  |           | Outlet                         | -     | -     | -     | 22.4  | 15.1 | 10.0 |
| 60   |                  | Inlet     | -                              | -     | 28.4  | 20.3  | 15.0  | 11.0 |      |
|      |                  | Outlet    | -                              | -     | 25.1  | 17.0  | 11.7  | 7.7  |      |
| 80   |                  | Inlet     | -                              | 30.8  | 22.4  | 16.8  | 12.6  | 9.3  |      |
|      |                  | Outlet    | -                              | 27.5  | 19.1  | 13.5  | 9.3   | 6.0  |      |
| 100  |                  | Inlet     | 27.8                           | 24.3  | 18.6  | 14.2  | 10.7  | 7.9  |      |
|      |                  | Outlet    | 24.5                           | 21.0  | 15.3  | 10.9  | 7.4   | 4.6  |      |
| 120  |                  | Inlet     | 22.8                           | 20.3  | 15.9  | 12.2  | 9.3   | 6.8  |      |
|      |                  | Outlet    | 19.5                           | 17.0  | 12.6  | 8.9   | 6.0   | 3.5  |      |
| 150  |                  | Inlet     | 18.1                           | 16.3  | 12.9  | 10.0  | 7.6   | -    |      |
|      |                  | Outlet    | 14.8                           | 13.0  | 9.6   | 6.7   | 4.3   | -    |      |
| ESM6 |                  | 40        | Inlet                          | -     | -     | -     | 42.6  | 32.4 | 25.3 |
|      |                  |           | Outlet                         | -     | -     | -     | 37.5  | 27.3 | 20.2 |
|      | 60               | Inlet     | -                              | -     | 46.2  | 35.1  | 27.7  | 21.9 |      |
|      |                  | Outlet    | -                              | -     | 41.1  | 30.0  | 22.6  | 16.8 |      |
|      | 80               | Inlet     | -                              | 49.6  | 37.9  | 30.2  | 24.2  | 19.3 |      |
|      |                  | Outlet    | -                              | 44.5  | 32.8  | 25.1  | 19.1  | 14.2 |      |
|      | 100              | Inlet     | 45.5                           | 40.5  | 32.7  | 26.6  | 21.5  | 17.1 |      |
|      |                  | Outlet    | 40.4                           | 35.4  | 27.6  | 21.5  | 16.4  | 12.0 |      |
|      | 120              | Inlet     | 38.5                           | 35.0  | 28.9  | 23.7  | 19.2  | 15.3 |      |
|      |                  | Outlet    | 33.4                           | 29.9  | 23.8  | 18.6  | 14.1  | 10.2 |      |
|      | 150              | Inlet     | 32.0                           | 29.5  | 24.7  | 20.4  | 16.6  | -    |      |
|      |                  | Outlet    | 26.9                           | 24.4  | 19.6  | 15.3  | 11.5  | -    |      |

|      | -Inlet Temp<br>(°F) | Flow<br>scfm | Outlet Pressure Dew Point (°F) |       |       |       |       |      |
|------|---------------------|--------------|--------------------------------|-------|-------|-------|-------|------|
|      |                     |              | 50                             | 40    | 20    | 0     | -20   | -40  |
| ESM7 | 40                  | Inlet        | -                              | -     | -     | 71.1  | 48.6  | 33.7 |
|      |                     | Outlet       | -                              | -     | -     | 61.5  | 39.0  | 24.1 |
|      | 60                  | Inlet        | -                              | -     | 79.2  | 54.5  | 38.6  | 27.1 |
|      |                     | Outlet       | -                              | -     | 69.6  | 44.9  | 29.0  | 17.5 |
|      | 80                  | Inlet        | -                              | 86.7  | 60.8  | 43.8  | 31.5  | 22.2 |
|      |                     | Outlet       | -                              | 77.1  | 51.2  | 34.2  | 21.9  | 12.6 |
|      | 100                 | Inlet        | 77.5                           | 66.6  | 49.3  | 36.2  | 26.2  | 18.5 |
|      |                     | Outlet       | 67.9                           | 57.0  | 39.7  | 26.6  | 16.6  | 8.9  |
|      | 120                 | Inlet        | 62.0                           | 54.4  | 41.2  | 30.5  | 22.1  | 15.6 |
|      |                     | Outlet       | 52.4                           | 44.8  | 31.6  | 20.9  | 12.5  | 6.0  |
|      | 150                 | Inlet        | 47.7                           | 42.4  | 32.5  | 24.2  | 17.6  | -    |
|      |                     | Outlet       | 38.1                           | 32.8  | 22.9  | 14.6  | 8.0   | -    |
| ESM8 | 40                  | Inlet        | -                              | -     | -     | 113.0 | 79.8  | 57.6 |
|      |                     | Outlet       | -                              | -     | -     | 98.3  | 65.1  | 42.9 |
|      | 60                  | Inlet        | -                              | -     | 124.8 | 88.5  | 65.0  | 47.4 |
|      |                     | Outlet       | -                              | -     | 110.1 | 73.8  | 50.3  | 32.7 |
|      | 80                  | Inlet        | -                              | 135.9 | 97.8  | 72.7  | 54.2  | 39.8 |
|      |                     | Outlet       | -                              | 121.2 | 83.1  | 58.0  | 39.5  | 25.1 |
|      | 100                 | Inlet        | 122.4                          | 106.3 | 80.8  | 61.4  | 46.1  | 33.8 |
|      |                     | Outlet       | 107.7                          | 91.6  | 66.1  | 46.7  | 31.4  | 19.1 |
|      | 120                 | Inlet        | 99.5                           | 88.4  | 68.8  | 52.7  | 39.7  | 29.2 |
|      |                     | Outlet       | 84.8                           | 73.7  | 54.1  | 38.0  | 25.0  | 14.5 |
|      | 150                 | Inlet        | 78.5                           | 70.6  | 55.8  | 43.0  | 32.4  | -    |
|      |                     | Outlet       | 63.8                           | 55.9  | 41.1  | 28.3  | 17.7  | -    |
| ESM9 | 40                  | Inlet        | -                              | -     | -     | 146.5 | 104.8 | 76.6 |
|      |                     | Outlet       | -                              | -     | -     | 127.7 | 86.0  | 57.8 |
|      | 60                  | Inlet        | -                              | -     | 161.4 | 115.7 | 86.0  | 63.7 |
|      |                     | Outlet       | -                              | -     | 142.6 | 96.9  | 67.2  | 44.9 |
|      | 80                  | Inlet        | -                              | 175.3 | 127.4 | 95.8  | 72.4  | 53.8 |
|      |                     | Outlet       | -                              | 156.5 | 108.6 | 77.0  | 53.6  | 35.0 |
|      | 100                 | Inlet        | 158.3                          | 138.1 | 106.1 | 81.4  | 62.0  | 46.2 |
|      |                     | Outlet       | 139.5                          | 119.3 | 87.3  | 62.6  | 43.2  | 27.4 |
|      | 120                 | Inlet        | 129.6                          | 115.5 | 90.9  | 70.4  | 53.8  | 40.1 |
|      |                     | Outlet       | 110.8                          | 96.7  | 72.1  | 51.6  | 35.0  | 21.3 |
|      | 150                 | Inlet        | 103.1                          | 93.1  | 74.4  | 58.0  | 44.4  | -    |
|      |                     | Outlet       | 84.3                           | 74.3  | 55.6  | 39.2  | 25.6  | -    |

**NOTES:**

1. Use inlet air temperature if the air entering the dryer has not been dried upstream (air is saturated).

If air has been dried (e.g. in a refrigerated dryer) use the dew point temperature of the inlet air.

2. Flow capacities are at 100 psig (7 kgf/cm<sup>2</sup>). Capacities are established in accordance with CAGI

(Compressed Air and Gas Institute) Standard ADF 700; Membrane Compressed Air Dryers -

Methods for Testing and Rating. Larger capacities, alternate pressures, and dew points consult factory.

| Model | 100°F Inlet to 40°F pdp |                    |             |                    |
|-------|-------------------------|--------------------|-------------|--------------------|
|       | Inlet Flow              |                    | Outlet Flow |                    |
|       | scfm                    | nm <sup>3</sup> /h | scfm        | nm <sup>3</sup> /h |
| ESM1  | 1.39                    | 2.36               | 1.20        | 2.04               |
| ESM2  | 4.55                    | 7.73               | 3.95        | 6.71               |
| ESM3  | 9.47                    | 16.09              | 8.15        | 13.85              |
| ESM4  | 13.69                   | 23.26              | 11.91       | 20.24              |
| ESM5  | 24.30                   | 41.29              | 21.00       | 35.68              |
| ESM6  | 40.50                   | 68.81              | 35.40       | 58.62              |
| ESM7  | 66.60                   | 113.15             | 57.00       | 96.84              |
| ESM8  | 106.30                  | 180.60             | 91.60       | 155.63             |
| ESM9  | 138.10                  | 234.63             | 119.30      | 202.69             |

| Model | 100°F Inlet to 0°F pdp |                    |             |                    |
|-------|------------------------|--------------------|-------------|--------------------|
|       | Inlet Flow             |                    | Outlet Flow |                    |
|       | scfm                   | nm <sup>3</sup> /h | scfm        | nm <sup>3</sup> /h |
| ESM1  | 0.85                   | 1.44               | 0.66        | 1.12               |
| ESM2  | 2.89                   | 4.91               | 2.29        | 3.89               |
| ESM3  | 5.69                   | 9.67               | 4.37        | 7.43               |
| ESM4  | 8.86                   | 15.05              | 7.08        | 12.03              |
| ESM5  | 14.20                  | 24.13              | 10.90       | 18.52              |
| ESM6  | 26.60                  | 45.19              | 21.50       | 36.53              |
| ESM7  | 36.20                  | 61.50              | 26.60       | 45.19              |
| ESM8  | 61.40                  | 104.32             | 46.70       | 79.34              |
| ESM9  | 81.40                  | 138.30             | 62.60       | 106.36             |

| Model | In / Out <sup>1</sup><br>Connections<br>inches                 | Dimensions     |      |    |     |                     |     |
|-------|--|----------------|------|----|-----|---------------------|-----|
|       |  | H <sup>2</sup> |      | W  |     | Weight <sup>3</sup> |     |
|       |  | in             | mm   | in | mm  | lbs                 | kg  |
| ESM1  | <sup>3</sup> Ü <sub>8</sub> " or <sup>1</sup> Ü <sub>2</sub> " | 16             | 404  | 4  | 105 | 8                   | 37  |
| ESM2  | <sup>3</sup> Ü <sub>8</sub> " or <sup>1</sup> Ü <sub>2</sub> " | 20             | 509  | 4  | 105 | 9                   | 42  |
| ESM3  | <sup>3</sup> Ü <sub>8</sub> " or <sup>1</sup> Ü <sub>2</sub> " | 24             | 613  | 4  | 105 | 10                  | 46  |
| ESM4  | <sup>3</sup> Ü <sub>8</sub> " or <sup>1</sup> Ü <sub>2</sub> " | 32             | 811  | 4  | 105 | 11                  | 51  |
| ESM5  | <sup>3</sup> Ü <sub>4</sub> " or 1"                            | 25             | 623  | 5  | 133 | 14                  | 65  |
| ESM6  | <sup>3</sup> Ü <sub>4</sub> " or 1"                            | 32             | 822  | 5  | 133 | 17                  | 79  |
| ESM7  | 1"   | 33             | 850  | 6  | 164 | 20                  | 93  |
| ESM8  | 1"   | 38             | 974  | 8  | 194 | 40                  | 181 |
| ESM9  | 1"   | 44             | 1130 | 8  | 194 | 45                  | 203 |

Maximum Operating Pressure: Membrane dryer: 200 psig (14 bar)

Maximum Inlet Temperature: 150°F (66°C)

Dimensions and weights are for reference only. Request certified drawings for construction purposes

Flow capacity at 100 psig (7 bar) and 100°F (38°C) saturated inlet.

Flow capacities are established in accordance with CAGI (Compressed Air and Gas Institute) Standard ADF 700: Membrane Compressed Air Dryers - Methods for testing and rating

<sup>1</sup> NPT or BSP - For BSP add B to the model number (eg. ESM1-3B)

<sup>2</sup> DMD model heights average 3.5" to 5.5" less

<sup>3</sup> DMD model weights average 3.2 lbs. to 4.8 lbs. less



# Membrane Technologies DMD Series Dryers ESM Series Dryers

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Please contact your local sales representative for product availability in your region.



#### **Deltech Headquarters**

4647 SW 40th Avenue  
Ocala, Florida 34474-5788 U.S.A.

**Tel.:** (724) 745-1555

**Fax:** (724) 745-6040

[deltechair.com](http://deltechair.com)